

Description:

The V85G Voltage-controlled Crystal Oscillator (VCXO) Series products provide a wide range of options in temperature stability, operating frequency range, and ultra low phase jitter in a 7.0 x 5.0 mm ceramic package with PECL or LVDS outputs..



Features:

- Available in frequencies from 1.5 to 200 MHz
- Tri-state Enable/Disable
- Hermetically sealed ceramic SMD package
- PECL / LVDS outputs
- RoHS-6/Leadfree compliant
- Integrated jitter 0.3 ps max.

Frequency Range

Frequency
1.5 to 200.5 MHz

Operating Temperature

Operating Temperature	Product Code
-10 to +60C	A
0 to +70C	B
-20 to 70C	C
-40 to 85C	D

Frequency Stability

Freq. Stability	Product Code
+/- 25 ppm	A
+/- 50 ppm	B

Frequency stability is inclusive of calibration at 25C, operating temp. range, input voltage variation, load variation, aging, shock, and vibration

Not all combinations of stability and temperature ranges available.

Aging: (typical at 20MHz after 30 days continuous operation)

Frequency	Timeframe	Aging	Product Code
20 MHz	1st Year	+/- 5.0ppm	N/A

Supply Voltage (Vs):

Power Supply (Vs)	2.5 Vdc +/-10%	3.3 Vdc +/-10%
Product Code	A	B

Frequency versus Voltage:

2.5 volt		3.3 volt	
0 to 2.5v on Pin 1	Product Code	0.3v to 3.0v on Pin1	Product Code
+/-100 ppm min	N/A	+/-100 ppm min	N/A

Current Consumption (I_{DD}):

Frequency Range (MHz)	I _{DD} (at 2.5V)	I _{DD} (at 3.3V)
	PECL / LVDS	PECL / LVDS
	mA	mA
1.500 to 64.999	75 / 45	75 / 45
65.000 to 200.000	100 / 80	100 / 80

Environmental:

Storage Temperature	-55 to +125 °C
---------------------	----------------

Output Waveform:

	PECL	PECL	LVDS	LVDS
Product Code	A		B	
	At 2.5 V	At 3.3 V	At 2.5 V	At 3.3 V
Output Logic 1	1.475 Vmin	2.275Vmin	1.6Vmax	1.6Vmax
Output Logic 0	1.095 Vmax	1.680Vmax	0.9Vmin	0.9Vmin
Rise/Fall Time (nS)	1 max	1 max	1 max	1 max


Tri-state function Pin 2:

Pin 2 = Output Active with 0.5 volts max on Pin 2

Pin2 = Output in high impedance state when 2.0 volts min. on Pin 2 or 2.5 volts min (for 3.3v supply)


Ordering Options:

Product Family	Operating Temperature	Temperature Stability	Supply Voltage	Output Type	Operating Frequency
V85G	A	A	A	A	XXX.XXXMHz
V85G	B	B	B	B	XXX.XXXMHz
V85G	C				XXX.XXXMHz
V85G	D				XXX.XXXMHz

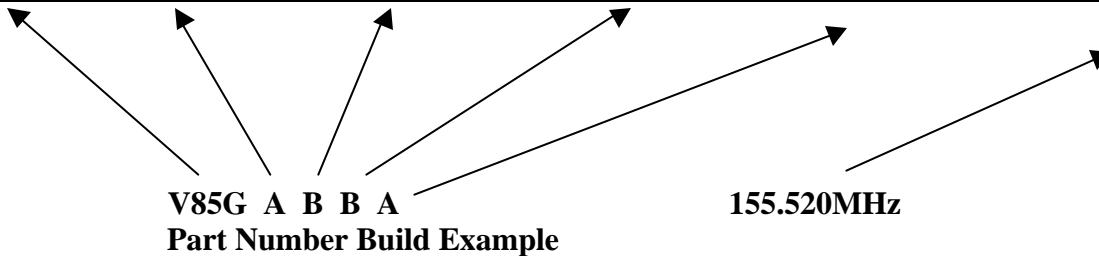

****Consult Bliley sales if other options required**

RoHs compliant ; -20 to 70C; +/- 50ppm; a 3.3 volt supply;PECL outputs and 155.520 MHz nominal operating frequency.

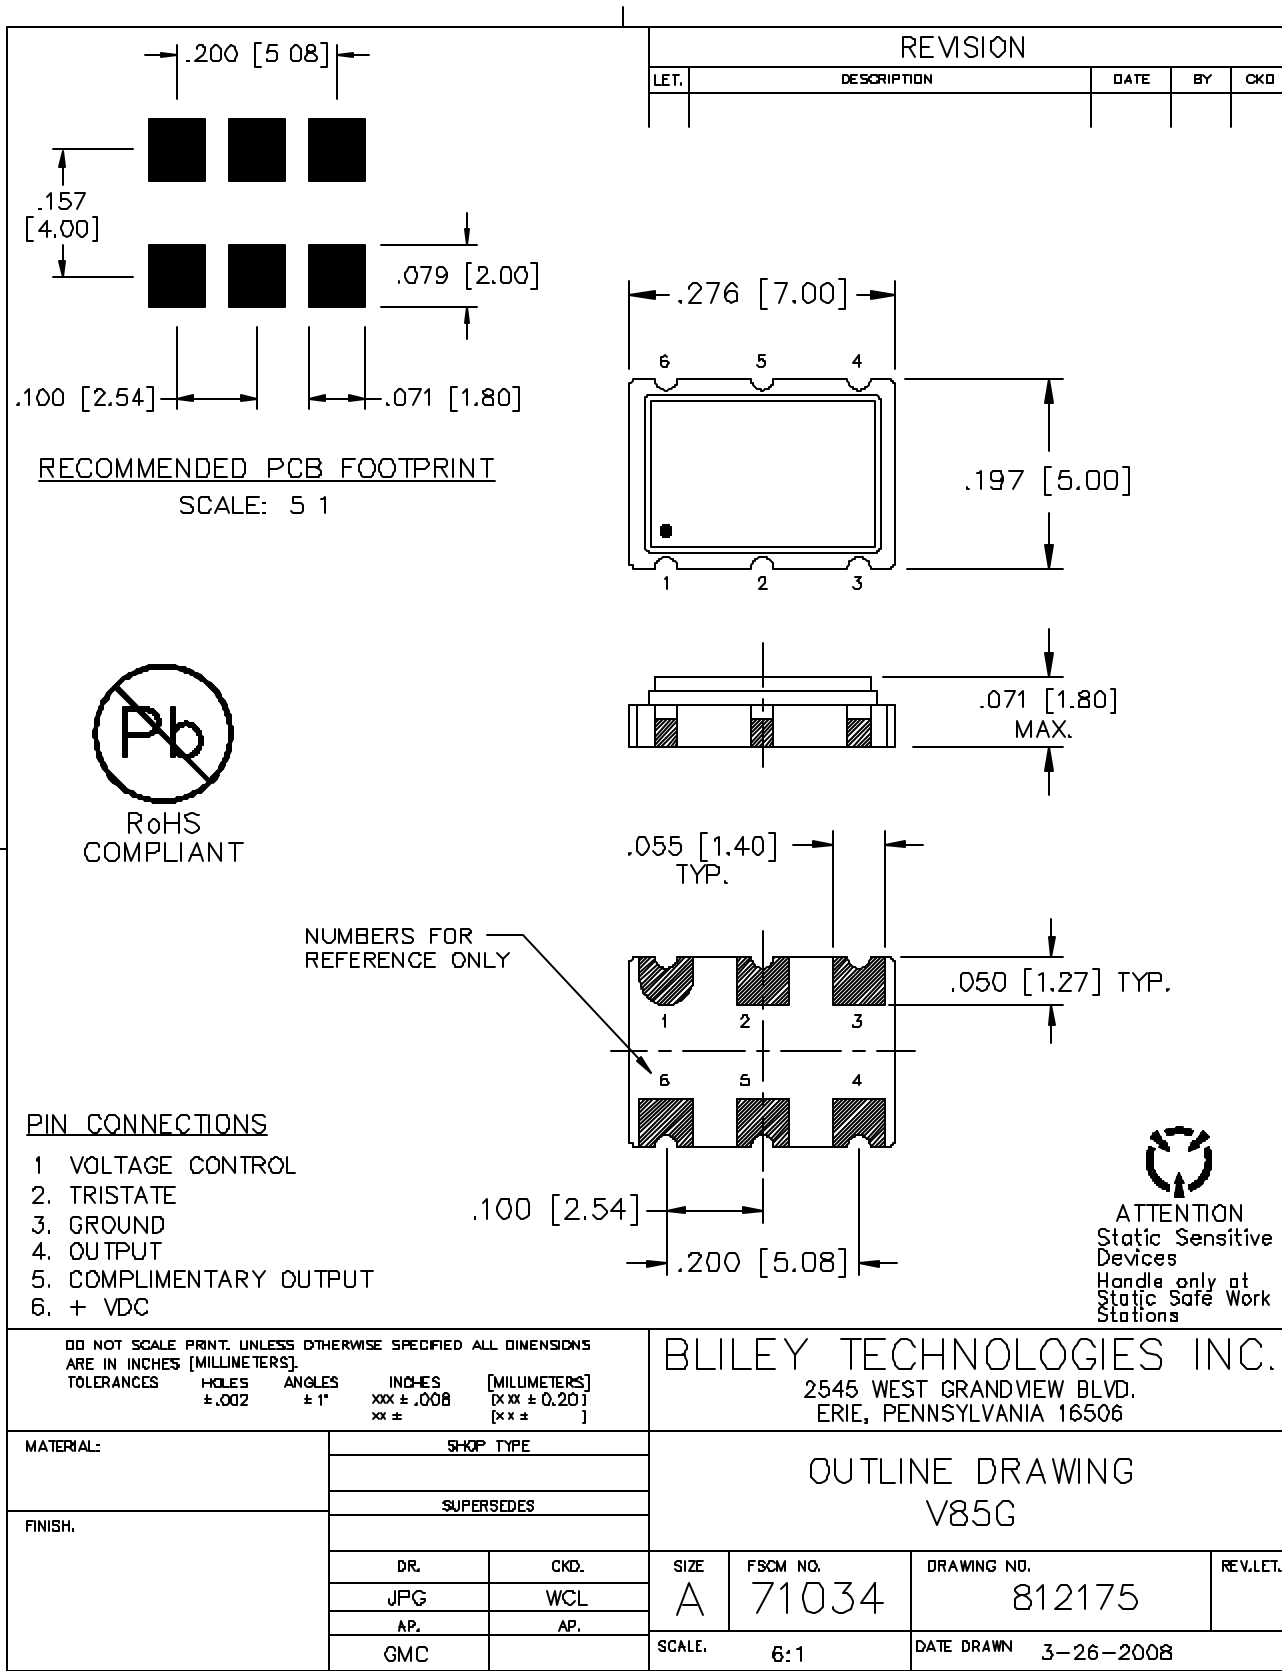

PE200-1

How to Order This Product:

Contact Bliley Technologies with Product Selection Code from Ordering Options Section above.

Attn:

Sales @ Bliley

Fax: **814-833-2712**

Phone: 814-838-3571

Email: info@bliley.com

Web: www.bliley.com

Date: _____

From:

Name: _____ Company: _____

Fax: _____ Phone: _____

Email: _____

Quantities to Quote: _____ Target Price: \$_____

Application / Reference #: _____