

High Freq. 20x13mm NV79 DIP OCXO

Features:

- 50MHz to 120MHz Output Frequency's
- Standard Frequency of 100 MHz.
- Excellent Stability and Noise in a miniature size
- Options for Phase noise, and FVT
- Available in surface mount, through hole or gull wing package styles.
- RoHS-6/Lead free Compliant
- Storage Temperature Range of -55°C to +85°C
- Manufactured in Erie, Pa. USA



Description:

The NV79 Series Ovenized Crystal Oscillator offers high stability Frequency vs. Temperature performance and SC Cut Crystal Phase Noise performance in a DIP configuration. It is ideally suited for base station, test equipment, synthesizers, and digital switching applications. It is available in three different package styles as well as custom frequencies between 50 to 120 Mhz. Standard frequency is 100 MHz.

Electrical Specifications

1. Output Characteristics

| | Parameter | Min. | Typ. | Max. | Unit | Test Conditions |
|-----|---------------------------|------|------|------|-------|-----------------|
| 1.1 | Frequency Range | 50 | | 120 | MHZ | |
| 1.2 | Initial Accuracy | | | ±50 | PPB | |
| 1.3 | Output Type | | | | | |
| | Sinusoidal | | | | | |
| | Output Level | 3 | 5 | | dBm | |
| | Load Impedance ±5% | 45 | 50 | 55 | Ω | |
| | Harmonic Content | | -25 | | dBc | |
| | Spurious Modulation | | | -60 | dBc | |
| 1.4 | Acceleration Sensitivity* | | | 1 | PPB/g | @100MHz |

*Please consult factory for acceleration sensitivity options regarding other frequencies.

2. Frequency Stability

| | Parameter | Min. | Typ. | Max. | Unit | Test Conditions | |
|--------------------------|---------------------------|--|----------|----------|--------|---|--|
| 2.1 | Frequency vs. Temperature | | | | | Referenced to Frequency @+25°C | |
| | 0°C to +50°C | | ±70 | | PPB | See Table 2 For Ordering Options | |
| | -20°C to +70°C | | ±100 | | PPB | See Table 2 For Ordering Options | |
| | -40°C to +85°C | | ±150 | | PPB | See Table 2 For Ordering Options | |
| 2.2 | Aging | Typical for 100MHz after 30 days of continuous operation | | | | | |
| | Per day after 30 days | | | ±5 | PPB | Typical at 100MHz after 30 days of continuous operation | |
| | 1 st Year** | | | ±300 | PPB | | |
| | 10 Years** | | | ±650 | PPB | | |
| 2.5 | Short Term | | 8 | | 10e-11 | τ = 1 Second | |
| 2.6 | Warm-up | | ±50 | | PPB | Within 3 minutes | |
| 2.7 | Static Phase Noise | See Table 2 for Ordering Options | | | | | |
| | | Option A | Option B | Option C | | | |
| | | $\mathcal{L}(f)$ @10Hz | -95 | -90 | -85 | | Tested @ +25°C±1°C Static Environment |
| | | $\mathcal{L}(f)$ @100Hz | -127 | -120 | -115 | | |
| | | $\mathcal{L}(f)$ @1KHz | -148 | -145 | -140 | | |
| | | $\mathcal{L}(f)$ @10KHz | -158 | -155 | -150 | | |
| $\mathcal{L}(f)$ @100KHz | -160 | -155 | -150 | | | | |

Values listed above are typical performance of a (100.000) MHz Fo

**Long term aging projection is calculated per MIL-PRF 55310 $f(t) = A(\ln(Bt+1))+F_0$

3. Input Characteristics

| | Parameter | Min. | Typ. | Max. | Unit | Test Conditions |
|-----|-------------------|------|------|------|------|----------------------------------|
| 3.1 | Supply Voltage | 4.75 | 5 | 5.25 | Vdc | See Table 2 for Ordering Options |
| 3.2 | Power Dissipation | | | | | |
| | Warm-up | | | 800 | mA | @25°C ±1°C ambient |
| | Steady State | | | 300 | mA | @25°C ±1°C ambient |

3. Input Characteristics (Continued)


| | Parameter | Min. | Typ. | Max. | Unit | Test Conditions |
|-----|------------------------------|------|----------|------|------|-------------------------------------|
| 3.3 | Electronic Frequency Control | | | | | |
| | Voltage Range | 0 | | 5.0 | Vdc | |
| | Center Voltage | | 2.5 | | Vdc | |
| | Frequency Range | ±0.8 | | | PPM | Consult Factory for Wide Pull Range |
| 3.4 | Slope | | Positive | | | |
| 3.5 | Input Impedance | 100K | | | Ω | |
| 3.6 | Linearity | | | 10 | % | |

4. Environmental, Reliability and Mechanical Specifications

| | Parameter | Min. | Typ. | Max. | Unit | Test Conditions |
|-----|-----------------------------------|---------|------|------|------|----------------------------------|
| 4.1 | Operational Temperature | -40 | | +85 | °C | See Table 2 For Ordering Options |
| 4.2 | Storage Temperature | -55 | | +85 | °C | |
| 4.3 | Shock Mil-Std 202G | Survive | | | | 1000 Single, 100 Repeated |
| 4.4 | Sinusoidal Vibration Mil-Std 202G | Survive | | | | 50G's rms 10 to 2000Hz |


Mechanical Dimensions, and Pin Functions

Standard Package Style (79A):

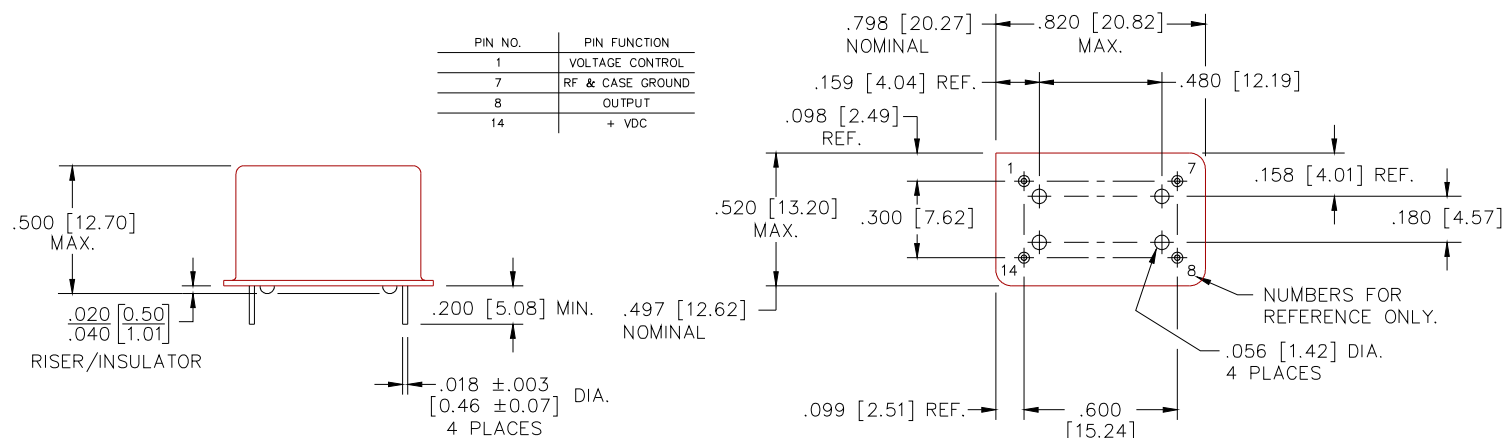

SMD Package styles:

Package type (79F Gull wing)

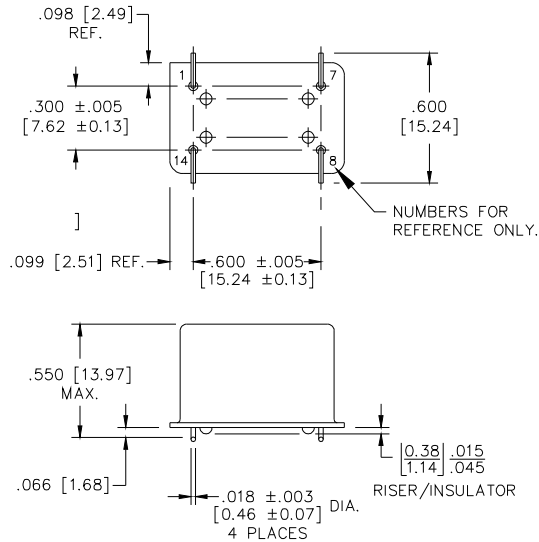

Package type (79G SMT)

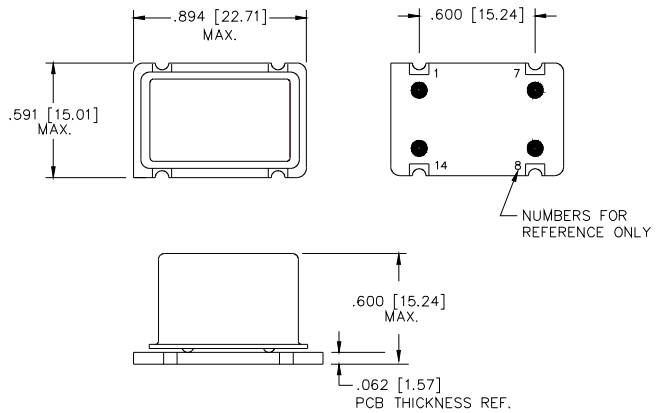


Table 1 Package Type, and Unit Style Selection

| Series and Type | Description |
|-----------------|---|
| N79A | Standard pin out package type OCXO with no EFC |
| NG79A | Standard pin out package type OCXO with no EFC, and RoHS Compliant |
| NV79A | Standard pin out package type OCXO with EFC |
| NVG79A | Standard pin out package type OCXO with EFC, and RoHS Compliant |
| N79F | Pin out package with gull-wing style lead formed OCXO with no EFC |
| NG79F | Pin out package with gull-wing style lead formed OCXO with no EFC, and RoHS Compliant |
| NV79F | Pin out package with gull-wing style lead formed OCXO with EFC |
| NVG79F | Pin out package with gull-wing style lead formed OCXO with EFC, and RoHS Compliant |
| N79G | Adapted SMD package type OCXO with no EFC |
| NG79G | Adapted SMD package type OCXO with no EFC, and RoHS Compliant |
| NV79G | Adapted SMD package type OCXO with EFC |
| NVG79G | Adapted SMD package type OCXO with EFC, and RoHS Compliant |

Table 2. Ordering Information

| See Table 1 | Phase Noise (dBc/Hz) (100MHz Phase Noise Performance) | | | | Temp Range | Stability | Supply | Output | Frequency |
|-------------------|--|------|------|------|-----------------------|------------------|--------|----------------|-------------------|
| | Options | A | B | C | A (0°C to +50°C) | A ±70 PPB | 5Vdc | A Sine-Wave | 50M to 120M |
| | 1Hz | -94 | -90 | -85 | B (-20°C to +70°C) | B ±100 PPB | | | |
| | 10Hz | -124 | -120 | -115 | | | | | |
| | 100Hz | -148 | -145 | -140 | C (-40°C to +85°C) | C ±150 PPB | | | |
| | 1KHz | -158 | -155 | -150 | | | | | |
| | 10KHz | -158 | -155 | -150 | | | | | |

The number generated here is for quote purposes only. The lettered options and their meaning can change with future releases of this sheet. This is release 1.2 of this sheet.

